




## Flame Retardant Duct Tape

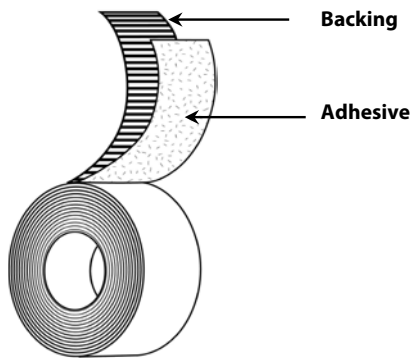

- Backing:** PE Coated Cloth
- Adhesive:** Rubber
- Liner:** N/A
- Colors:** White Printed, Silver (not printed)
- Specifications:** Meets FAR 25.853(a) & DMS 1968E Listed Fk05-006 and Fk05-113.
- Standard Sizes:** 48mm x 55m, 72mm x 55m

### Applications

- Cargo pit applications for freight carrying aircraft
- Challenging applications where high adhesion and flame resistance is critical
- Seaming and repairing cargo compartment liners
- Covering pins & rivets
- General purpose patching, sealing & bundling

### Features

- PE-Coated Cloth Backing
- Natural Rubber Based Adhesive
- Complies with FAR 25.853(a)

### Benefits

- High tensile strength for difficult applications
- Extremely conformable
- Crisp, straight tear
- Moisture, solvent & abrasion resistant
- Aggressive adhesion to all surfaces
- Resists flagging and lifting
- Meets requirements for use in aircraft cargo compartments

### Physical Properties

|                              | Standard UOM | Metric UOM | Test Method   |
|------------------------------|--------------|------------|---------------|
| <b>Total Thickness</b>       | 12 mils      | 304.8 mic  | ASTM D-1000   |
| <b>Adhesion to Steel</b>     | 40 oz/in     | 4.38 N/cm  | PSTC-101      |
| <b>Tensile Strength</b>      | 29 lb/in     | 50.79 N/cm | ASTM D-1000   |
| <b>Operating Temperature</b> | 40 to 200 °F | 4 to 93 °C |               |
| <b>Exiting Time</b>          | 3 sec        |            | FAR 25.853(a) |
| <b>Burn Length</b>           | 5.5"         |            | FAR 25.853(a) |
| <b>Drip Exiting</b>          | N/a          |            | FAR 25.853(a) |

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F  
 Standard Shelf Life (at 25C): 24 months from date of manufacture.

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.