



Accredited to ASA-100
and FAA AC 00-56A




108PE

FR Double-Coated Cloth Tape

Flame retardant double-coated cloth tape with flame retardant synthetic rubber adhesive.

For carpet installation on interior floors and stairs of aircraft. Used with confidence by Boeing, Douglas, Lockheed, and major national and international airlines and refurbishers.

Designed with a flame retardant cotton cloth and synthetic adhesive systems that complies with F.A.R. 25.853(a). High strength, with great quick-stick and adhesion. Easy to tear and realign for ease of installation. Highly conformable. Extremely aggressive adhesive for a secure bond. Compliance with safety requirements. Designed for residue-free removal.

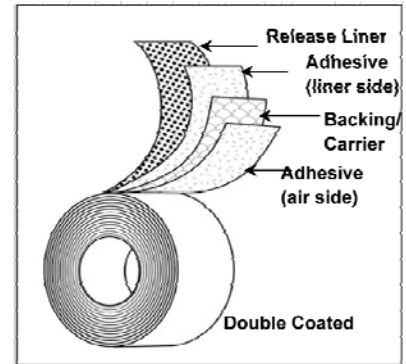

Adhesive

Rubber

Backing

FR Cotton Cloth

12 Second Vertical Burn - FAR 25.853(a) -

Drip

No drip

Length

4.5 sec

Time

1.5 sec.

Adhesion to steel (PSTC-1)

60 oz/in / 67.2 g/mm

Adhesion to aluminum (Liner side) (PSTC-1)

60 oz/in / 67.2 g/mm

Tensile Strength (ASTM D-1000)

55 lb/in / .986 kg/mm

Thickness (ASTM D-1000)

15 mils / 0.381 mm

Weight (ASTM D-1000)

13 oz / sq. yd. / 472.9 g/m²

Specifications

Boeing – BMS 5-133E

FAR 25.853(a)

Note: The above are typical values and should not be used in writing specifications.

For Pricing and Information

please contact:

KIEPURA AVIATION CORP.

61 Church Street

Littleton, New Hampshire 03561 USA

Tel: 603-444-3459 / Fax: 603-444-0790

Toll Free: 1-888-522-8273

(USA/Canada)

Email: info@kiepuraaviation.com

www.kiepuraaviation.com